


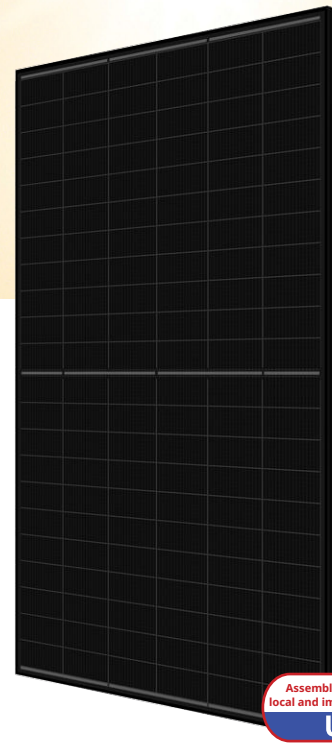

Assembled in the US from
local and imported components
USA

N-type Bifacial Module

TOPBiHiKu6 Black*

CS6.2-66TB-600 | 605 | 610 | 615 | 620 | 625 | 630HR

*Module features a black frame and clear glass with partial black grid

MORE POWER



Elegant dual-glass design for rooftop and other installations



Module power up to 630 W
Module efficiency up to 23.3 %



Up to 85% Power Bifaciality,
more power from the back side



Excellent anti-LeTID & anti-PID performance.
Low power degradation, high energy yield



Lower temperature coefficient (Pmax): $-0.29\%/^{\circ}\text{C}$,
increases energy yield in hot climate



Lower LCOE & system cost

MORE RELIABLE



Tested up to ice ball of 35 mm diameter
according to IEC 61215 standard



Minimizes micro-crack impacts



Heavy snow load up to 6000 Pa,
wind load up to 5400 Pa*



**Enhanced Product Warranty on Materials
and Workmanship***



Linear Power Performance Warranty*

1st year power degradation no more than 1%

Subsequent annual power degradation no more than 0.4%

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001: 2015 / Quality management system

ISO 14001: 2015 / Standards for environmental management system

ISO 45001: 2018 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730

UL 61730 / IEC 61701 / IEC 62716



* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.


Canadian Solar Inc., a BNEF Tier 1 and S&P Global Tier 1 module manufacturer, is a leading provider of integrated solar and energy storage solutions. With over 24 years of expertise, the company has delivered more than 165 GW of premium-quality solar modules worldwide.

* For detailed information, please refer to the Installation Manual.

CS Power Systems Inc.

1350 Treat Blvd. Suite 500, Walnut Creek, CA 94597 | www.canadiansolar.com/na | service.ca@CSPowertech.com

Rear View

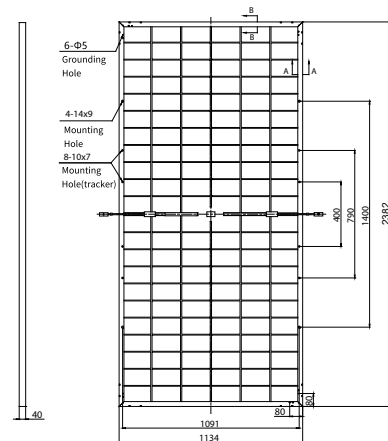

Frame Cross Section

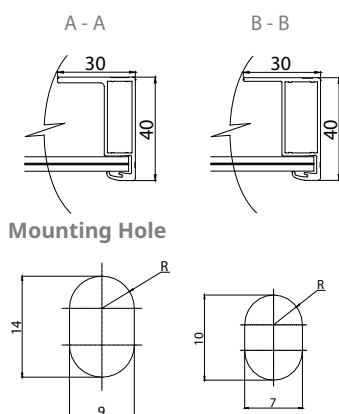


Figure 1 consists of two graphs, A and B, showing the effect of temperature and heat flux on the critical heat flux (CHF) of a micro-pin-finned tube.

Graph A shows CHF (W/m²) on the y-axis (0 to 18) versus heat flux (q'' , W/m²) on the x-axis (0 to 60). The CHF decreases sharply as q'' increases, and the CHF values are higher for higher temperatures (5°C, 25°C, 45°C, 65°C).

Graph B shows CHF (W/m²) on the y-axis (0 to 18) versus velocity (V , m/s) on the x-axis (0 to 60). The CHF decreases sharply as V increases, and the CHF values are higher for higher temperatures (5°C, 25°C, 45°C, 65°C).

Legend for both graphs:

- 1000 W/m² (Red)
- 800 W/m² (Dark Gray)
- 600 W/m² (Light Gray)
- 400 W/m² (Orange)
- 200 W/m² (Yellow)

Temperature labels on the right of Graph B:

- 5°C (Red)
- 25°C (Dark Gray)
- 45°C (Light Gray)
- 65°C (Orange)

		Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Module Efficiency
	600	600 W	42.2 V	14.23 A	48.9 V	15.30 A	22.2%
Bifacial Gain**	5%	630 W	42.2 V	14.94 A	48.9 V	16.07 A	23.3%
	10%	660 W	42.2 V	15.65 A	48.9 V	16.83 A	24.4%
	20%	720 W	42.2 V	17.08 A	48.9 V	18.36 A	26.7%
	605	605 W	42.4 V	14.29 A	49.1 V	15.36 A	22.4%
Bifacial Gain**	5%	635 W	42.4 V	15.00 A	49.1 V	16.13 A	23.5%
	10%	699 W	42.4 V	16.50 A	49.1 V	17.74 A	25.9%
	20%	839 W	42.4 V	19.81 A	49.1 V	21.29 A	31.1%
	610	610 W	42.6 V	14.34 A	49.3 V	15.43 A	22.6%
Bifacial Gain**	5%	641 W	42.6 V	15.06 A	49.3 V	16.20 A	23.7%
	10%	705 W	42.6 V	16.56 A	49.3 V	17.82 A	26.1%
	20%	845 W	42.6 V	19.88 A	49.3 V	21.39 A	31.3%
	615	615 W	42.8 V	14.39 A	49.5 V	15.50 A	22.8%
Bifacial Gain**	5%	646 W	42.8 V	15.11 A	49.5 V	16.28 A	23.9%
	10%	710 W	42.8 V	16.62 A	49.5 V	17.90 A	26.3%
	20%	852 W	42.8 V	19.94 A	49.5 V	21.48 A	31.5%
	620	620 W	43.0 V	14.42 A	49.7 V	15.56 A	23.0%
Bifacial Gain**	5%	651 W	43.0 V	15.14 A	49.7 V	16.34 A	24.1%
	10%	716 W	43.0 V	16.66 A	49.7 V	17.97 A	26.5%
	20%	859 W	43.0 V	19.99 A	49.7 V	21.57 A	31.8%
	625	625 W	43.2 V	14.49 A	49.9 V	15.62 A	23.1%
Bifacial Gain**	5%	656 W	43.2 V	15.21 A	49.9 V	16.40 A	24.3%
	10%	722 W	43.2 V	16.74 A	49.9 V	18.04 A	26.7%
	20%	866 W	43.2 V	20.08 A	49.9 V	21.65 A	32.1%
	630	630 W	43.4 V	14.54 A	50.1 V	15.70 A	23.3%
Bifacial Gain**	5%	662 W	43.4 V	15.27 A	50.1 V	16.49 A	24.5%
	10%	728 W	43.4 V	16.79 A	50.1 V	18.13 A	27.0%
	20%	873 W	43.4 V	20.15 A	50.1 V	21.76 A	32.3%

**** Bifacial Gain:** The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500 V (IEC/UL)
Module Fire Performance	TYPE 29 (UL 61730) or CLASS C (IEC61730)
Max. Series Fuse Rating	35 A
Protection Class	Class II
Power Tolerance	0 ~ + 10 W
Power Bifaciality*	80 %

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

	Nominal Max. Power (Pmax)	Opt. Operating Voltage (Vmp)	Opt. Operating Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)
600	454 W	39.9 V	11.38 A	46.3 V	12.33 A
605	458 W	40.1 V	11.42 A	46.5 V	12.38 A
610	461 W	40.3 V	11.46 A	46.7 V	12.43 A
615	465 W	40.5 V	11.50 A	46.9 V	12.49 A
620	469 W	40.7 V	11.54 A	47.1 V	12.54 A
625	473 W	40.8 V	11.58 A	47.2 V	12.58 A
630	477 W	41.0 V	11.62 A	47.4 V	12.65 A

MECHANICAL DATA

Specification	Data
Cell Type	TOPCon cells
Cell Arrangement	132 [2 x (11 x 6)]
Dimensions	2382 × 1134 × 40 mm (93.8 × 44.6 × 1.57 in)
Weight	33.4 kg (73.6 lbs)
Front Glass	2.0 mm heat strengthened glass with anti-reflective coating
Back Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4.0 mm ² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	1400 mm (55.1 in)*
Connector	T6 or MC4-EVO2A
Per Pallet	27 pieces
Per 53' Truck	540 pieces

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.29 % / °C
Temperature Coefficient (Voc)	-0.25 % / °C
Temperature Coefficient (Isc)	0.045 % / °C
Nominal Module Operating Temperature	41 ± 3°C

PARTNER SECTION

