
Be Prepared with RESU PRIME





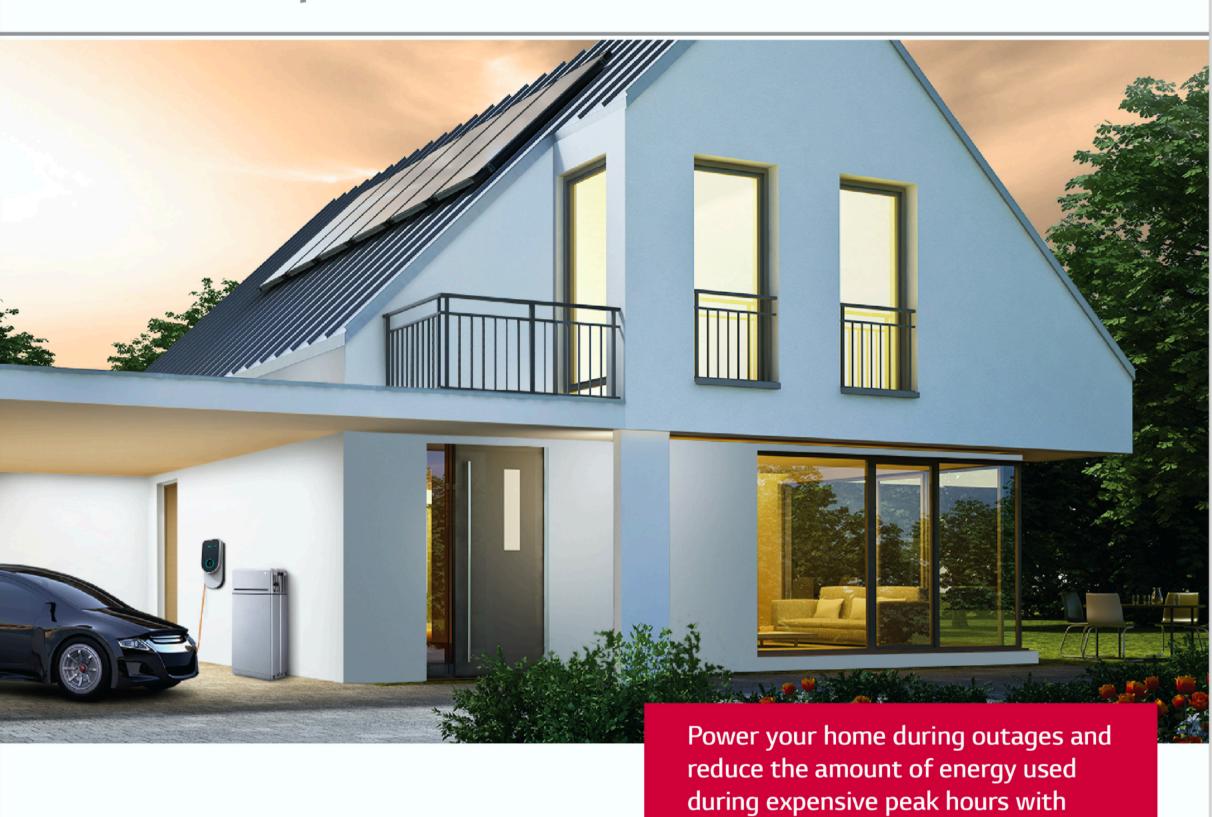

RESUhome batteries.

RESU10H PRIME



Be Prepared with RESU PRIME

The ultimate value LG RESU is offering to custoamers is the maximum security for electricity consumption regardless of external uncertainties by realizing energy independence with eco-friendly solar energy.

RESU16H PRIME

"The world's largest capacity home battery for whole home backup"

World's Largest Capacity (16kWh, 7kW) to back up essential loads in peak time and blackouts




RESU10H PRIME

"The smartest choice of first home battery for daily use"

Enough capacity (9.6kWh, 5kW) to back up critical loads during peak time and emergencies



RESU10H PRIME

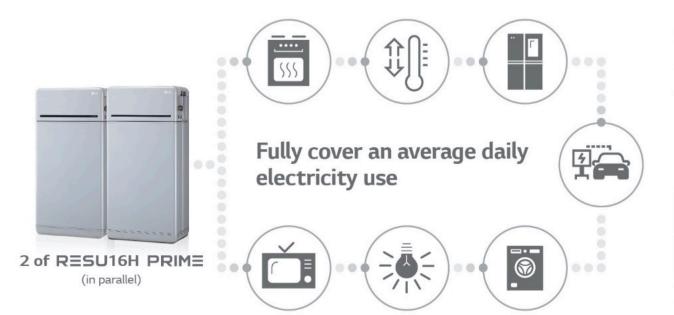


Maximum energy and high power output enable **whole home backup** both in peak time and blackouts.

	R≣SU16H x 2ea	R≣SU10H x 2ea
Capacity	32 kWh	19.2 kWh
Power	14 kW	10 kW

*May vary depending on the size of household and energy consumption

Unique Modular Design

With its unique modular design, RESU Prime can be divided into a battery control unit and two battery modules. It enables easier transportation, handling, and installation.

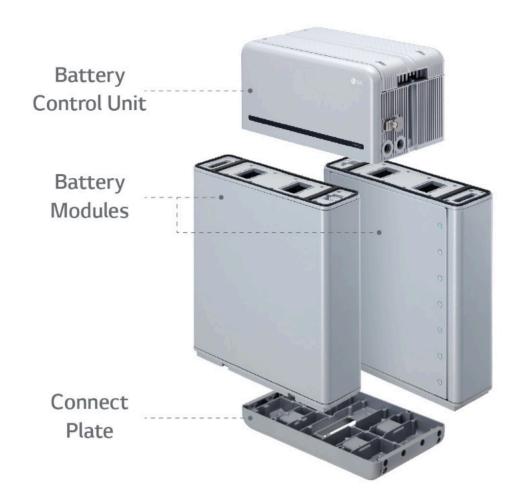

		Conventional	RESU PRIME
On-the-Spot	Carry & Handle	Lift needed	No lift
Maintenance The detachable Control Unit can be replaced on site,	Workload	2-3 Insrallers	1-2 Insrallers
saving maintenance time and cost	After sales Service(*)	Collect & Replace	Early diagnosls & On-the-Spot Maintenance

^{*}May vary depending on specific conditions

RESU Monitoring

Real time battery status monitoring and early diagnosis with RESU Monitor

RESU Monitor remotely monitors battery conditions in real time and proactively diagnoses in case of anomalies, enabling installers to take quick and accurate remedial actions.



App/Web-based UI
For Installers & End Customers

^{*}May vary depending on specific condition

Specification



Usable Energy (DoD 100%) [kWh] 16 Power (Rated/Peak) [kW] 7/11

Power (Rated/Peak) [kW]		7/11		
Voltage [V]		350~450		
Round-trip Efficiency [%]		> 90		
Storage Power Consumption [W]		< 0.1		
Dimension [W x H x D, inch]		19.8 x 42.8 x 11.6		
Weight [lb]	Total	352		
	Module	286 (143 x 2EA)		
	Control Unit	55		
	Connect Plate	11		
Installation Type		Floor-standing		
Scalability		Up to 2 units (32kWh / 14kW)		
Operational Temperature [°F]		-50~122		
Ingress Rating		IP55		
Warranty		70% @10 years (Global)		
Communication		CAN & RS485		
Certification	Cell	UL 1642		
	Product	CE/FCC/RCM/IEC62619/		
	Froduct	UL1973/IEC62477		

Compatible Inverters : SMA, Solaredge, SUNGROW, GOODWE, Solis



R	≡SU10H	PRIM∃		
Usable Energy (DoD 100%) [kWh]		9.6		
Power (Rated/Peak) [kW]		5/7		
Voltage [V]		350~450		
Round-trip Efficiency [%]		> 90		
Storage Power Consumption [W]		< 0.1		
Dimension [W x H x D, inch]		19.8 x 32.1 x 11.6		
Weight [lb]	Total	246		
	Module	180 (90 x 2EA)		
	Control Unit	55		
	Connect Plate	11		
Installation Type		Floor-standing & Wall-mounted		
Scalability		Up to 2 units (19 kWh / 10 kW)		
Operational Temperature [°F]		-50~122		
Ingress Rating		IP55		
Warranty		70% @10 years (Global)		
Communication		CAN & RS485		
Certification	Cell	UL 1642		
	Product	CE/FCC/RCM/IEC62619/		
		UL1973/IEC62477		



LG Home Battery R≡SU www.lghomebattery.com

^{*}Values provided for 77°F