

Assembled in the US  
from imported components

# TOPHiKu6 (All-Black)

N-type TOPCon Technology

445 W ~ 470 W

CS6.1-54TM-445 | 450 | 455 | 460 | 465 | 470H

### MORE POWER



Module power up to 470 W  
Module efficiency up to 23.0 %



Excellent anti-LeTID & anti-PID performance.  
Low power degradation, high energy yield



Lower temperature coefficient (Pmax): -0.29%/°C,  
increases energy yield in hot climate



Lower LCOE & system cost

### MORE RELIABLE



Minimizes micro-crack impacts



Heavy snow load up to 8100 Pa,  
wind load up to 6000 Pa\*



**Industry Leading Product Warranty on Materials and Workmanship\***



**Linear Power Performance Warranty\***

**1<sup>st</sup> year power degradation no more than 1%  
Subsequent annual power degradation no more than 0.4%**

\*Subject to the terms and conditions contained in the applicable Canadian Solar Limited Warranty Statement. Also this 25-year limited product warranty is available only for products installed and operating on rooftops in certain regions.

### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2015 / Quality management system  
ISO 14001:2015 / Standards for environmental management system  
ISO 45001: 2018 / International standards for occupational health & safety  
IEC62941: 2019 / Photovoltaic module manufacturing quality system

### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730  
IEC 61701 / IEC 62716 / IEC 60068-2-68  
Take-e-way




\* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

**CSI Solar Co., Ltd.** is committed to providing high quality solar photovoltaic modules, solar energy and battery storage solutions to customers. The company was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey. Over the past 22 years, it has successfully delivered over 100 GW of premium-quality solar modules across the world.


\* For detailed information, please refer to the Installation Manual.

## ENGINEERING DRAWING (mm)


### Rear View

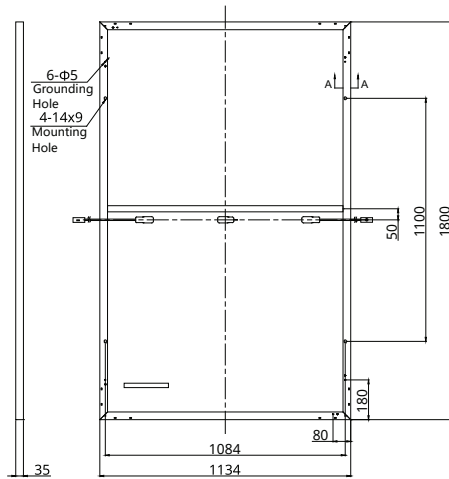

### Frame Cross Section

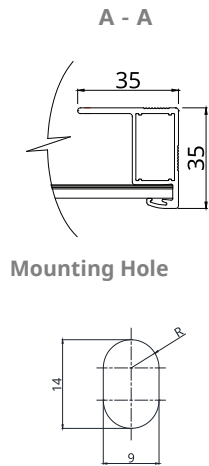

## CS6.1-54TM-455H / I-V CURVES

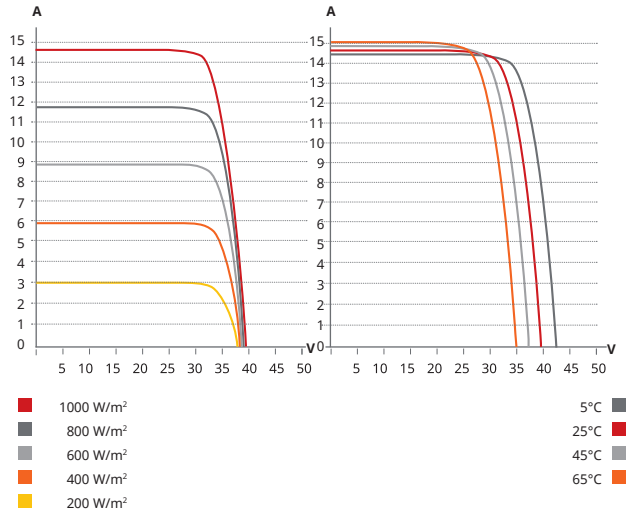

## ELECTRICAL DATA | STC\*

| CS6.1-54TM                   | 445H  | 450H    | 455H    | 460H    | 465H    | 470H    |
|------------------------------|---|---------|---------|---------|---------|---------|
| Nominal Max. Power (Pmax)    | 445 W   | 450 W   | 455 W   | 460 W   | 465 W   | 470 W   |
| Opt. Operating Voltage (Vmp) | 32.8 V  | 33.0 V  | 33.2 V  | 33.4 V  | 33.6 V  | 33.8 V  |
| Opt. Operating Current (Imp) | 13.59 A   | 13.66 A | 13.72 A | 13.78 A | 13.85 A | 13.91 A |
| Open Circuit Voltage (Voc)   | 38.7 V  | 38.9 V  | 39.1 V  | 39.3 V  | 39.5 V  | 39.7 V  |
| Short Circuit Current (Isc)  | 14.48 A   | 14.55 A | 14.61 A | 14.69 A | 14.77 A | 14.86 A |
| Module Efficiency            | 21.8%   | 22.0%   | 22.3%   | 22.5%   | 22.8%   | 23.0%   |
| Operating Temperature        | -40°C ~ +85°C   |         |         |         |         |         |
| Max. System Voltage          | 1500V (IEC/UL) or 1000V (IEC/UL)  |         |         |         |         |         |
| Module Fire Performance      | TYPE 1 (UL 61730 1500V) or TYPE 2 (UL 61730 1000V) or CLASS C (IEC 61730) |         |         |         |         |         |
| Max. Series Fuse Rating      | 25 A  |         |         |         |         |         |
| Application Classification   | Class A   |         |         |         |         |         |
| Power Tolerance              | 0 ~ + 10 W  |         |         |         |         |         |

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## MECHANICAL DATA

| Specification          | Data   |
|------------------------|--|
| Cell Type              | TOPCon cells                                       |
| Cell Arrangement       | 108 [2 X (9 X 6)]                                  |
| Dimensions             | 1800 × 1134 × 35 mm<br>(70.9 × 44.6 × 1.38 in)     |
| Weight                 | 23 kg (50.7 lbs)                                   |
| Front Cover            | 3.2 mm tempered glass with anti-reflective coating |
| Frame                  | Anodized aluminium alloy                           |
| J-Box                  | IP68, 3 bypass diodes                              |
| Cable                  | 4 mm <sup>2</sup> (IEC), 12 AWG (UL)               |
| Connector              | T6, MC4, MC4-EVO2 or MC4-EVO2A                     |
| Cable Length           | 1550 mm (61.0 in) (+) /<br>1100 mm (43.3 in) (-)   |
| Per Pallet             | 31 pieces  |
| Per Container (40' HQ) | 744 pieces   |

## ELECTRICAL DATA | NMOT\*

| CS6.1-54TM                   | 445H    | 450H    | 455H    | 460H    | 465H    | 470H    |
|------------------------------|---------|---------|---------|---------|---------|---------|
| Nominal Max. Power (Pmax)    | 335 W   | 339 W   | 343 W   | 347 W   | 351 W   | 354 W   |
| Opt. Operating Voltage (Vmp) | 30.9 V  | 31.1 V  | 31.3 V  | 31.5 V  | 31.7 V  | 31.9 V  |
| Opt. Operating Current (Imp) | 10.85 A | 10.91 A | 10.96 A | 11.02 A | 11.07 A | 11.12 A |
| Open Circuit Voltage (Voc)   | 36.5 V  | 36.7 V  | 36.9 V  | 37.1 V  | 37.3 V  | 37.5 V  |
| Short Circuit Current (Isc)  | 11.68 A | 11.74 A | 11.79 A | 11.85 A | 11.92 A | 11.99 A |

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

## TEMPERATURE CHARACTERISTICS

| Specification                        | Data         |
|--------------------------------------|--------------|
| Temperature Coefficient (Pmax)       | -0.29 % / °C |
| Temperature Coefficient (Voc)        | -0.25 % / °C |
| Temperature Coefficient (Isc)        | 0.05 % / °C  |
| Nominal Module Operating Temperature | 42 ± 3°C     |

## PARTNER SECTION



\* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.